

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER


NORTHEAST Corner of Section 7, Township 113, Range 39, 5TH P.M.

STATE OF MINNESOTA, County of YELLOW MEDICINE

At the corner location shown on the sketch:

- On _____ found a _____
DATE
- left monument as found, lowered monument, removed monument (explain)
- On 11-22-2010 placed a SURVEY SPIKE WITH SEAL #43844.
DATE

SKETCH OF REFERENCE TIES

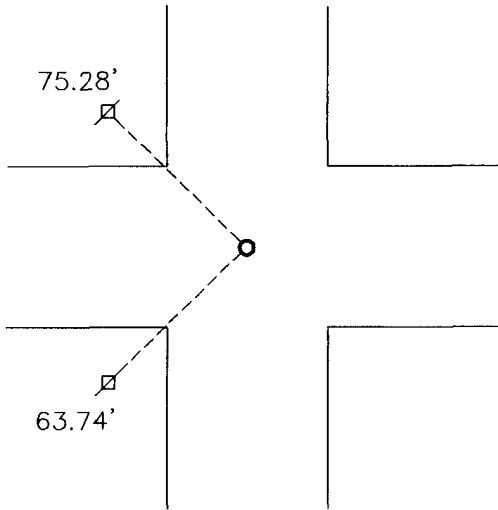

Minnesota State Plane Coordinate
 System Yellow Medicine County Datum
 NAD83 (1996)
 N: 127057.815
 E: 582000.922

Nail and seal in utility pole SW 63.74'
 Nail and bottle cap in utility pole NW 75.28'

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

[Signature] 1/10/11
 SIGNATURE DATE

Registration No. 43844

- Land Surveyor, Professional Engineer
- County Surveyor, County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the Co. Recorders office at _____ .M on the _____ day of _____ A.D. 20 _____

County Recorder _____

By _____, Deputy

DOCUMENT NO. _____

Statement of Evidence

In 1864, Chas E. Davis & J. W. Webb, Jr. did the original subdivision of the township.

On July 8, 1890, Jonah Peterman, the County Surveyor, found the corner while doing a survey of Sections 6 and 7.

In 1929, John Norgaard found the corner using ties from the road engineer's office.

The Yellow Medicine County Highway Department did a total grading project in the area. However they did record ties to the corner as follows:

Nail and seal in power pole Southwest 63.74'

Nail and bottle cap in power pole Northwest 75.28'

On November 22, 2010, Bueltel-Moseng Land Surveying set a survey spike with seal #43844 using the ties recorded by the county.


Doc# 252036 Fee: \$0.00 2 Pages

Office of County Recorder

Yellow Medicine County, Minnesota

I hereby certify that the within instrument
was filed on January 13, 2011 at 8:20 AM

Kay Zempel, Yellow Medicine County Recorder

BY  Deputy

N/C

Bueltel-Moseng Land Surveying
P.O. Box 32
Marshall, MN 56258