

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

Corner to Section 29 Township 114 N. Range 42 W.

No. _____

STATE OF MINNESOTA,


County of Yellow Medicine S.S.

I hereby certify that on the 25 th day of August 1983,
that I, Lyle E. Moseng, a Registered Land Surveyor, ~~County Surveyor,~~
~~County Highway Engineer,~~ ^{SET} found the East Quarter corner of Section 29-114-42
which was evidenced by see back

and I further certify that to perpetuate the
location of such corner I did, at the exact location thereof, place a permanent
marker consisting of 5/8 inch rerod with seal Number 11943.

I further certify that I established 3 references or witness monuments consist-
ing of Fence post and power pole which reference or witness monuments are
located in the manner following.

dh nail and seal in power pole NW. 91.47 feet
dh nail and seal in corner fence post East 32.77 feet
center of post (1/2" iron pipe in Conc.) West 34.10 feet

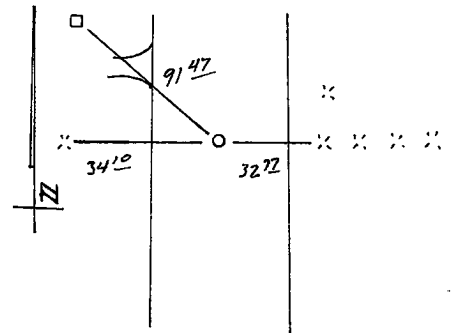

Dated at Marshall, Minnesota, this 26 th day of August, 1983.

183025
OFFICE OF THE REGISTER OF DEEDS

County of Yellow Medicine

Lyle E. Moseng
~~County Surveyor, County Highway Engineer,~~
Registered Land Surveyor No. 11943

I hereby certify that the within instrument was filed in this office for
record on the 16 day of November A.D., 1983, at 3:55 o'clock P.M.

Norman J. Opdahl, County Recorder

Register of Deeds

by Kay Nordahl Deputy

After digging for the corner and finding nothing I tried to set the corner midway and on line between the section corners, the corner would not fit existing evidence so I set the corner in line with fence to the east and fence post to the west and 33 feet west of fence to the east and 33 feet east of power poles to the west. The corner is 5.2 feet west and 5.33 feet north of a direct split between section corners.