



CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

North Quarter Corner of Section 7, Township 116 N., Range 41 W., 5 th P.M.
STATE OF MINNESOTA, County of Yellow Medicine

At the corner location shown on the sketch:

- On _____ found a _____ I did not dig the ditch and culvert were dug
DATE
destroying any corner
 - left monument as found, lowered monument, removed monument (explain)
- On 27 Aug. 1986 placed a 5/8 inch rerod with seal See Back
DATE

SKETCH OF REFERENCE TIES

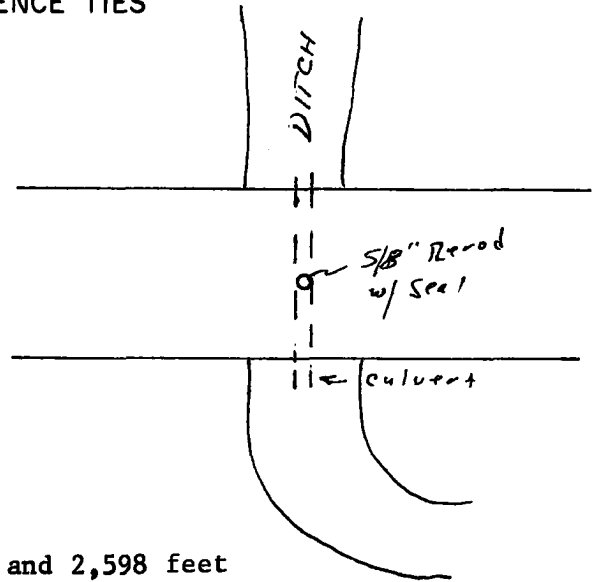

Corner is on line between section corners and 2,598 feet West of the Northeast Section corner and 2,389 feet West of the Northwest Section corner.

RECORDED
GRANTED
GRANTED
INDEXED

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Ryle E. Money 30, Aug 1986
SIGNATURE DATE

Registration No. 11943
 Land Surveyor, Professional Engineer
 County Surveyor, County Engineer

OFFICE OF THE COUNTY RECORDER
County of Yellow Medicine

I hereby certify that this document was filed in the Co. Recorders office at 11:10 AM. on the 2 day of September A.D., 19 86

County Recorder Norman J. Opdahl
By Kay Nordahl, Deputy
DOCUMENT NO. 189058

Statement of Evidence:

In 1913 John Norgaard than County Surveyor could not find the corner he set it on line between the section corners and 2,598 feet East of the Northeast corner and 2,389 feet West of the Northwest corner, he did not set a monument

In 1916 John Norgaard set a jasper stone by the same method as above.

On Aug. 27, 1986 I set a 5/8 inch rerod with seal by the same method, the corner was destroyed by construction of ditch and culvert.