

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

East _____ Corner of Section 22, Township 114, Range 39, 5th P.M.

STATE OF MINNESOTA, County of Yellow Medicine


At the corner location shown on the sketch:

On June 19, 2001 found a 3 inch semi-circle iron
DATE

left monument as found, lowered monument, removed monument (explain)

On _____ placed a _____
DATE

SKETCH OF REFERENCE TIES

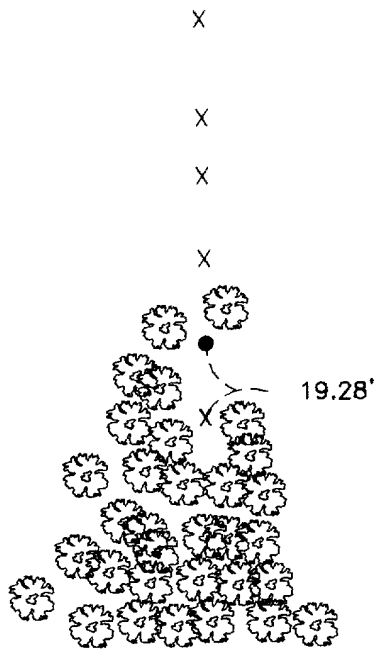

South 19.28' Nail & Seal
RLS into top of wooden post

farmed field

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Legi C Moway 7-16-01
SIGNATURE DATE

Registration No. 11943

Land Surveyor, Professional Engineer
 County Surveyor, County Engineer

OFFICE OF THE COUNTY RECORDER
County of _____

I hereby certify that this document was filed in the Co. Recorders office at 10:25 A.M on the 13 day of August A.D. 2001

County Recorder Kay Nerdahl

By Shirley Rohlik, Deputy

DOCUMENT NO. 226591

Statement of Evidence

In May 1914, John Nordgaard, recorded setting the corner on line and equal distance between section corners.

On November 7, 1979, Southwest Engineering (Willard Pellinen), found a 3" semi-circle iron bar and is 3.5 feet longer than the recorded distance, but equal distance ± 0.5 feet between section corners.

On June 19, 2001, Moseng Land Surveying found 3' semi-circle iron bar from the notes of Willard Pellinen.