

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER


North Quarter Corner of Section 28, Township 114, Range 45, 5th P.M.

STATE OF MINNESOTA, County of Yellow Medicine

At the corner location shown on the sketch:

- On _____ found a _____
DATE
- left monument as found, lowered monument, removed monument (explain)
- On 6-28-2000 placed a 5/8" rerod with seal #11943
DATE

SKETCH OF REFERENCE TIES

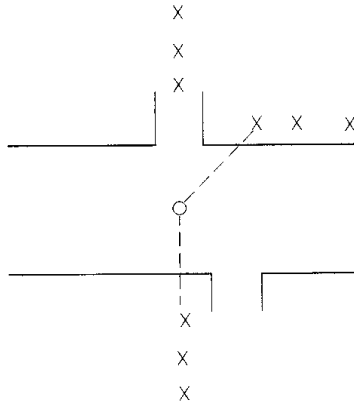

Nail and Seal in corner fence post 50.52' South

Nail and Seal in top of end post 51.60' Northeast

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Lytle E. Moring 2-25-04
SIGNATURE DATE
Registration No. 11943

- Land Surveyor, Professional Engineer
- County Surveyor, County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the Co. Recorders office at _____ M on the _____ day of _____ A.D. 20 _____

County Recorder _____

By _____, Deputy

DOCUMENT NO. _____

Statement of Evidence

In June of 1901 John Norgaard set a bolt in the original government corners and recorded the distances 2627 feet from the northwest corner and 2640 feet from the northeast corner.

On June 28, 2000 Moseng Land Surveying set a $\frac{5}{8}$ " rerod with seal #11943 by proportionate method $2640 / 5267 \times / 5273.77 \times = 2643.39$ from northeast corner to the north quarter corner.

Doc# 237029 Fee: \$.00 2 Pages
Office of County Recorder, Yellow Medicine County, Minnesota
I hereby certify that the within instrument was
filed on January 7, 2005 at 03:55 PM

Kay Zempel, Yellow Medicine County Recorder
BY Steve Kihlek Deputy