

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

EAST QUARTER Corner of Section 23, Township 113 N., Range 39 W., 5th P.M.

STATE OF MINNESOTA, County of YELLOW MEDICINE

At the corner location shown on the sketch:

■ On 7/11/89 found a DECAYED WOOD STAKE, DOWN 2.5'
DATE


■ left monument as found, □ lowered monument, □ removed monument (explain)

■ On 7/11/89 Placed a 1 1/4" X 1 1/4" X 20" PERFORATED STEEL TUBE WITH
DATE ALUMINUM CAP STAMPED "DNR SURVEY MARKER", DOWN 0.5'

SKETCH OF REFERENCE TIES



NOTE:
PLACED 3/4" X 24" IRON ROD
INSIDE MONUMENT DOWN 0.5'
MONUMENT IS
3.0' WEST CL N-S ROAD

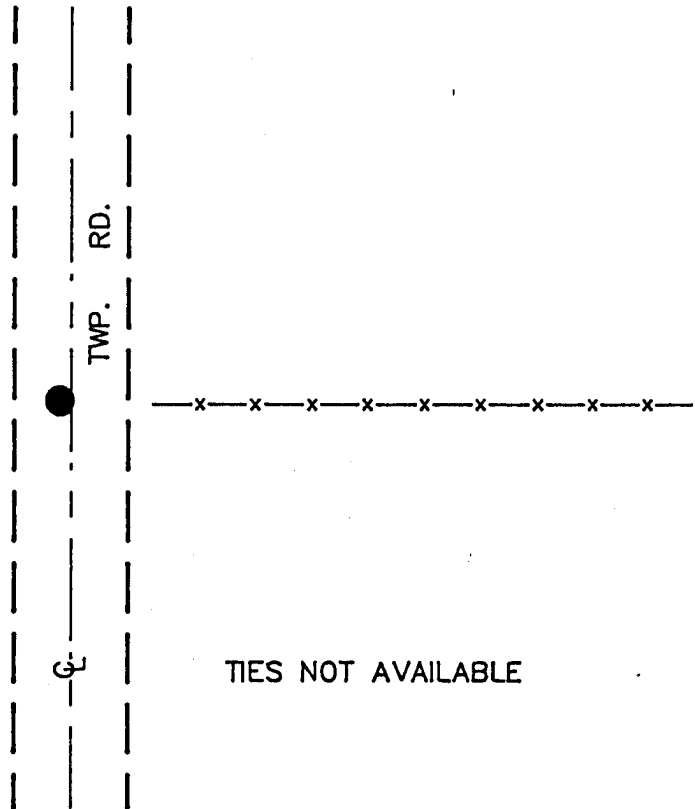

Statement of evidence relative to this corner location is on back of page.

7/25/89
G-225

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Louell R. Pommeroy Jr. 8-2-89
SIGNATURE DATE

Registration No. 17005

- Land Surveyor, □ Professional Engineer
□ County Surveyor, □ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Yellow Medicine

I hereby certify that this document was filed in the Co. recorders office at 11:05 A. .M. on the 4 day of August A.D., 1989

County Recorder Norman Osofsky

By _____, Deputy

DOCUMENT NO. 195717

East Quarter Corner Section 23, Township 113 North, Range 39 West

The DNR Bureau of Engineering contacted the following offices for information on this corner:

MN Secretary of State
Yellow Medicine County Recorder and Highway Engineer
Moseng Land Surveying at Marshall
KBM at Redwood Falls

- 1864 The U.S. General Land Office notes in the Secretary of State's Office show a post set in a mound for the corner.
- 1901 Surveyor's Record Book B, from the County Recorder's Office, contains a collection of what was found at government section corners by John Norgaard, County Surveyor, in a township re-monumentation survey. Norgaard states, on page 219, the northeast corner of Section 23 was set equal distance from this corner, a quarter post, and the other adjoining quarter corners.
- 1910 Surveyor's Record Book, from the County Recorder's Office, contains a survey by John Norgaard, County Surveyor. On page 215, this corner is described as a found stake set by Norgaard in the government mound 10 years ago. Corner is shown to measure:
2652 ft. from the northeast corner Section 23
2650 ft. from the northeast corner Section 26
- 1989 July 11, the DNR Bureau of Engineering hired a backhoe operated by Wyatt Bendix of Echo to dig for evidence of this corner. Found the remains of a decayed wood stake down 2.5 ft.. Stake was found to be:
in line with fence east
3.0 ft. west of centerline north-south road
2655.95 ft. from the northeast corner Section 23
2652.05 ft. from the northeast corner Section 26
Placed a 3/4" by 24" iron rod in the center of the stake remains and a DNR Survey Marker with 3/4" by 24" iron rod within down 0.5 ft. over the stake remains.

Analysis of the available information led the DNR Bureau of Engineering to conclude that the found remains of the stake mark the location of the corner.