

# CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

East Quarter \_\_\_\_\_ Corner of Section 4, Township 115, Range 45, 5th P.M.

STATE OF MINNESOTA, County of Yellow Medicine


At the corner location shown on the sketch:

On \_\_\_\_\_ found a \_\_\_\_\_  
DATE

left monument as found,  lowered monument,  removed monument (explain)

On Nov. 14, 1996 placed a 5/8" Iron w/seal #11943  
DATE  
\*\* SEE BACK \*\*

### SKETCH OF REFERENCE TIES

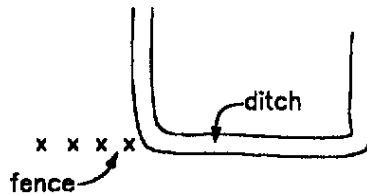

NE Corner Section 4-115-45

2588.86'  
2638.13'

SE Corner Section 4-115-45

RECORDED  
GRANTOR ✓  
GRANTEE ✓  
INDEXED ✓

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Lyle C. Mooney 11/15/1996  
SIGNATURE DATE

Registration No. 11943

Land Surveyor,  Professional Engineer  
 County Surveyor,  County Engineer

OFFICE OF THE COUNTY RECORDER  
County of Yellow Medicine

I hereby certify that this document was filed in the Co. Recorders office at 2:10 P.M on the 20th day of November A.D. 1996

County Recorder Nomand Spade  
By \_\_\_\_\_, Deputy

DOCUMENT NO. 213053

STATEMENT OF EVIDENCE:

The original survey Sept. 19, 1871 set post & mound 40 chains north of the southeast section corner.  
Total mile = 78.60 chains

No records of corner were found.

Yellow Medicine County Highway Department always considered it a straight line between the section corners.

No digging took place in the asphalt road at the request of the Yellow Medicine County Highway Department.

We tried to set the corner by single proportionate measurements, but it fell 22 feet north of the existing fence line & ditch line to the west. I set the corner on line between section corners and in line with fence to the west.