CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

_____NORTH QUARTER_____ Corner of Section ___33___ , Township __114 N___ , Range __46 W__

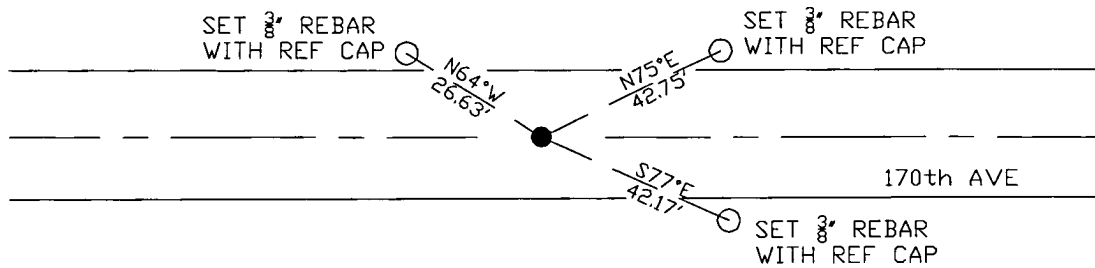5th Principal Meridian, State of Minnesota, County of Yellow Medicine.

At the corner location shown on the sketch:

[X] On ___10/25/17___ found a __DNR SURVEY MARKER Aluminum cap._____
         DATE

[X] left monument as found ☐ lowered monument ☐ removed monument (explain)

☐ On _____ placed a _____
         DATE

SKETCH OF REFERENCE TIES

SET ⅜" REBAR WITH REF CAP
SET ⅜" REBAR WITH REF CAP
N64°W 26.63'
N75°E 42.75'
S77°E 42.17'
170th AVE
SET ⅜" REBAR WITH REF CAP
N
N.T.S.

Statement of evidence for this corner location is on back of this page.

I hereby certify that this document was researched and prepared by me or under my direct supervision and that I am a licensed Land Surveyor under the laws of the State of Minnesota.

Signature _____

Date __3/26/18__   License No.___45874___

Title:

[X] Land Surveyor   ☐ Professional Engineer

☐ County Surveyor   ☐ County Engineer

STATEMENT OF EVIDENCE:

NORTH QUARTER OF SECTION 33, T114N, R46W, 5TH PM

1871 Corner was originally established by the U.S. General Land Office as a post set in raised mound.

1913 Surveyors Record Book contains a survey completed by John Norgaard in which the monument is shown in place and measures 2644' to the NE and NW corners of Section 33.

2001 MN DNR completed a survey for Sections 33 and 34 in which they set a DNR SURVEY MARKER over found stone at corner location, and completed a corner record dated 06/04/01.
N: 138298.308
E: 367455.669

2017—10—25 Westwood PS searched the area and found a DNR SURVEY MARKER Aluminum cap which agrees with 2001 DNR Survey. Accepting monument as the corner location and set 3 reference ties.